


MKR-19 - 60 Amp Circuit Breaker

Product # 1855106

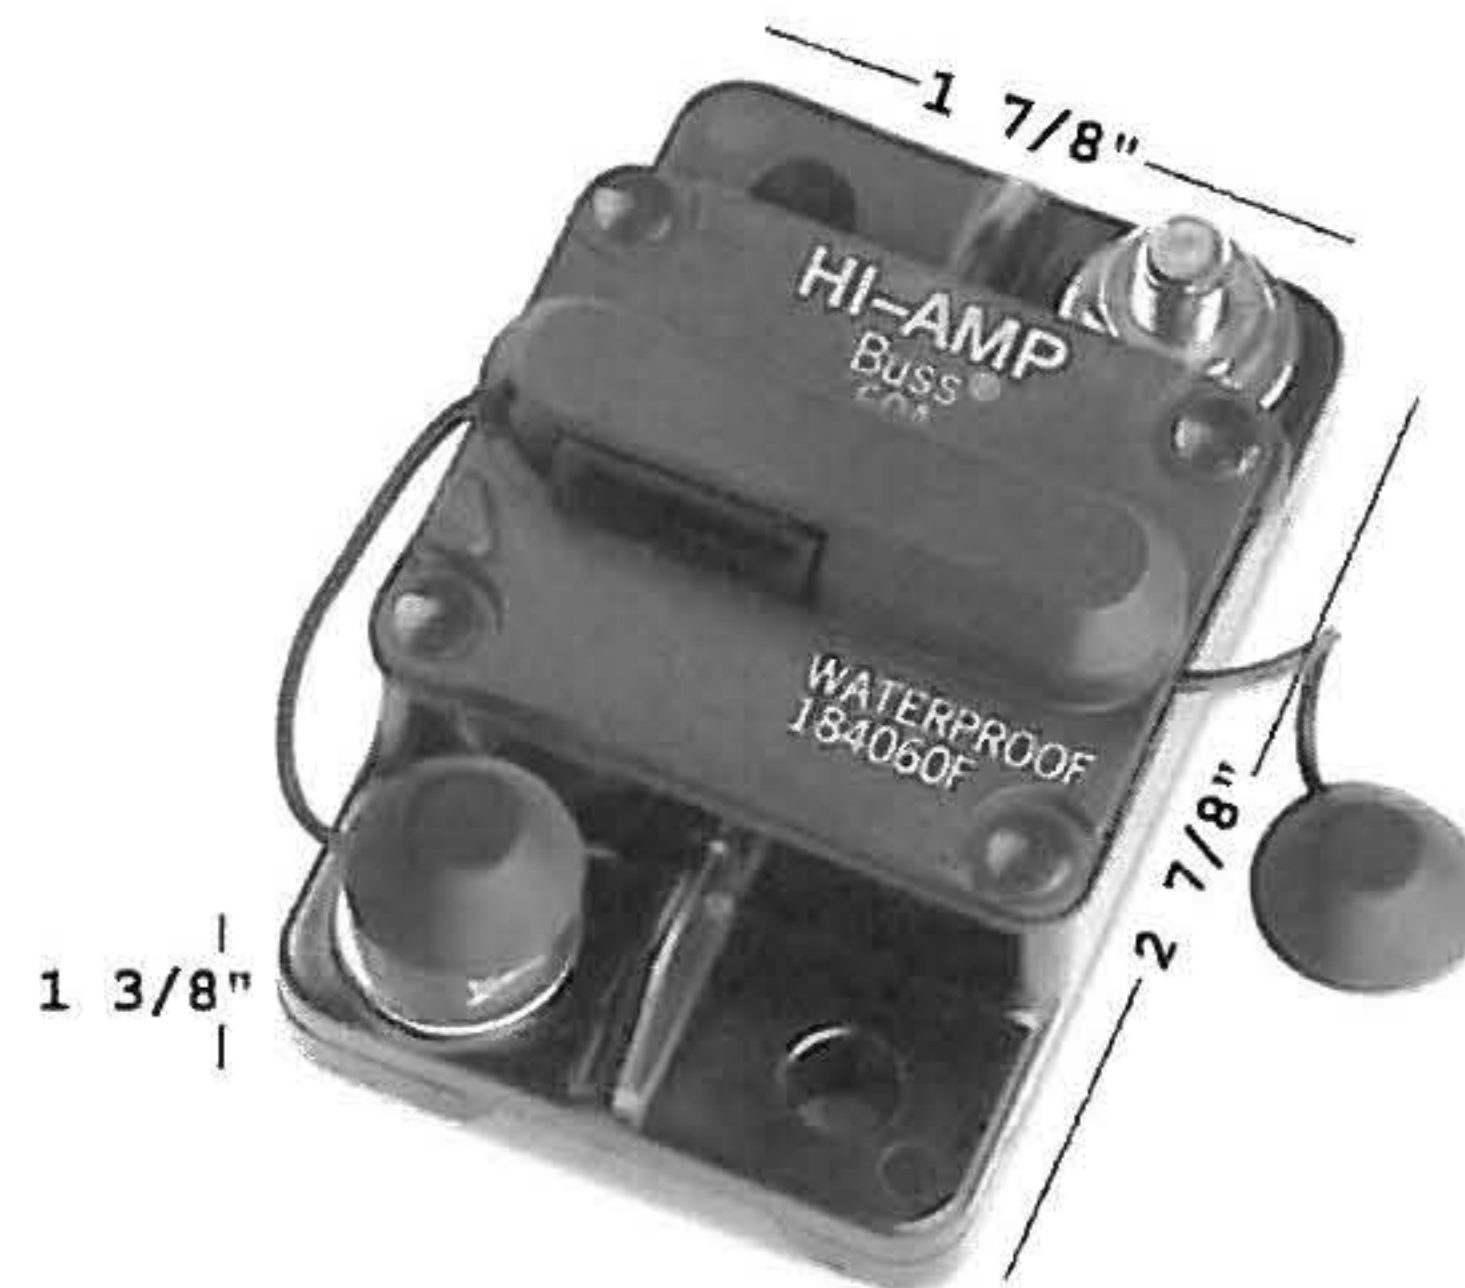

Service Part number 2378205

1. Protects trolling motor from electrical damage.
2. 60 amp rating with manual reset.
3. Fully waterproof.
4. Compatible with all 12, 24, and 36 volt systems.
5. Studs 1/4" x 28

INSTALLATION OF 60 AMP MANUAL RESET BREAKER

1. Determine a suitable mounting location for the Circuit Breaker in your boat. (We recommend installing the breaker as close as possible to the battery / batteries.)
2. Mount the Circuit Breaker using the two holes in the breaker base. (Mounting hardware not included.)
3. Connect the trolling motors positive (+) power cable to the terminal marked "AUX" on the Circuit Breaker.
4. Connect the Circuit Breaker terminal marked "BAT" to the positive (+) battery post.
(See diagrams below for 12, 24 and 36v use.)

